
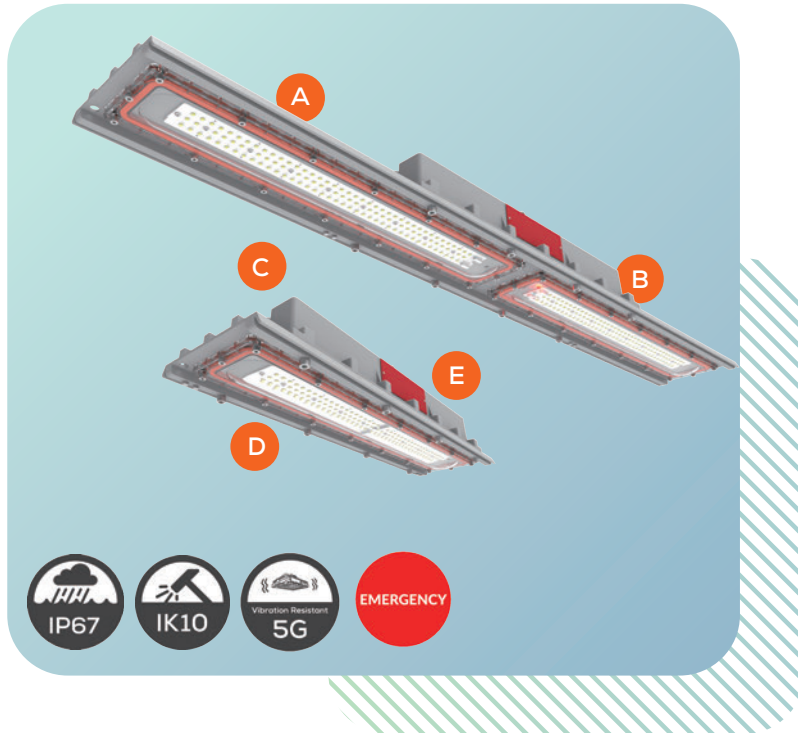


# ARROW™ GHV

Designed to be installed in areas where flammable gases, vapors, or dusts are present in sufficient quantities to create a risk of explosion or fire.


CLASS I DIV. 2	CLASS II DIV. 1	
CLASS II DIV. 2	CLASS III	

## KEY FEATURES



- A LOW PROFILE AND LIGHTER.** 100mm fixture height, perfect for mounting in confined or low height areas.
- B SIMPLE INSTALLATION.** Clamshell design easy access to drivers and multiple entries standard for easy through wiring.
- C HIGH OUTPUT.** 2 models from 5,100 to 13,600 lumens with up to 170Lm/W.
- D MULTIPLE BEAM ANGLES.** 30°, 60°, 90°, 110°, T2, T3, T4, different lens provide more choices for various scenarios.
- E EMERGENCY BATTERY BACK-UP.** 90-minutes minimum running time at 8W in emergency mode.

## 9 MOUNTING OPTIONS

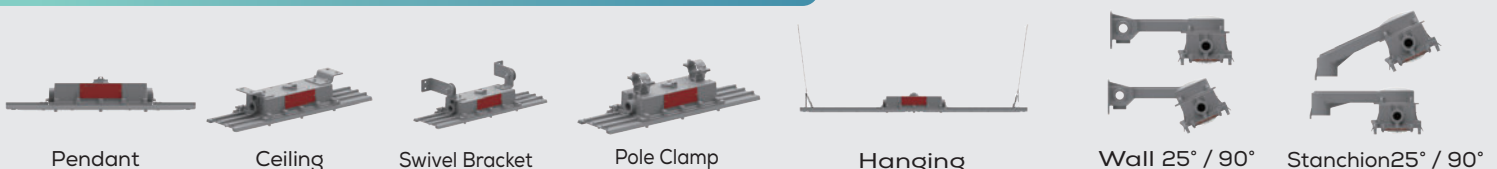

## HAZLOC EMERGENCY LINEAR LIGHTING

### CLASSIFICATIONS

#### NEC/CEC Standard

UL 844 Hazardous Locations  
 Class I Division 2, Group A, B, C, D  
 Class II Division 1, Group E, F, G  
 Class II Division 2, Group F, G  
 Class III  
 Class I, Zone 2, Group IIC  
 Zone 21, Zone 22

UL 924  
 UL 1598 Wet Locations  
 UL 8750 LED Safety  
 CSA C22.2 No.137-M1981  
 CSA C22.2 NO. 250.0

### TECHNICAL DATA

#### ELECTRIC & OPTICAL

Rated Power	30W / 40W / 45W / 60W / 80W
Input Voltage	AC120-277V
Lumen Output	5,100lm ~ 13,600lm
Luminous Efficacy	170Lm/W
Beam Angle	30° / 60° / 90° / 110° / T2 / T3 / T4
Color Temperature	Amber/2700K/3000K/4000K/5000K
CRI	Ra>70

#### EMERGENCY OPTIONS

Emergency power	15W
Lumen Output	≥2,400lm
Recharging time	24 hours
Rated autonomy	≥90 mins

#### ENVIRONMENTAL & TECHNICAL

Ambient Temperature	-20°C~+50°C
Lens Material	Polycarbonate
Mounting Options	Pendant / Ceiling / Wall mount / Stanchion / U-Bracket
Cable Entries	3/4" NPT, 1-1/4" NPT, 1-1/2" NPT
Net Weight	4.6kg (2Ft) / 6.2kg (4Ft)

### OPTIONS AND WARRANTY

- Clear / diffuse polycarbonate lens
- Safety cable
- 10kV surge protector is standard, 20kV is optional
- 1-10V dimming capabilities
- L70 > 150,000 operation hours@ 25°C
- 5-year limited system warranty